

SIGNATURE PAGE

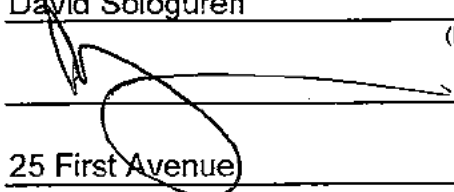
F-121-2026

To the Monmouth County Board of County Commissioners:

**THE UNDERSIGNED HEREBY DECLARES THAT
I (WE) HAVE CAREFULLY EXAMINED THE SPECIFICATIONS.
I (WE) HEREBY CERTIFY PRICES QUOTED ARE IN ACCORDANCE
WITH YOUR REQUIREMENTS.**

Company Name: C.J. Hesse, Inc.
(PRINT)

Preparer's Name: David Sologuren
(PRINT)

Signature:  6/24/2026
(DATE)


Address: 25 First Avenue
Atlantic Highlands, New Jersey, 07716

Telephone No.: 732-291-8100

Fax No.: 732-495-6225

E-Mail Address: dsologuren@cjhesse.com
*****(This should be the email where Contracts would be sent)*****

Contact Person: David Sologuren

FEIN: 
(Federal Employee ID)

BRC: 0103507
(Business Registration Certificate)

SCHEDULE OF QUANTITIES & PRICES

Project Entitled:

**2026 RESURFACING OF VARIOUS COUNTY ROADS
MONMOTH COUNTY, NEW JERSEY
RFB # F-121-2026**

<u>ITEM No.</u>	<u>ESTIMATED QUANTITIES</u>	<u>ITEM</u>	<u>UNIT PRICE</u>	<u>AMOUNT</u>
1	181,000 Dollars	Uniformed Police Officers Allowance	\$ 1.00	\$ 181,000.00
2	1 Lump Sum	Concrete Washout System	\$ 500.00	\$ 500.00
3	2 Units	Oil Only Emergency Spill Kit, Type 1	\$ 500.00	\$ 1,000.00
4	71,000 Dollars	Fuel Price Adjustment	\$ 1.00	\$ 71,000.00
5	107,000 Dollars	Asphalt Price Adjustment	\$ 1.00	\$ 107,000.00
6	2 Units	Excavation, Test Pits (If and Where Directed)	\$ 500.00	\$ 1,000.00
7	50 C.Y.	Excavation, Unclassified (If and Where Directed)	\$ 20.00	\$ 1,000.00
8	50 C.Y.	Excavation, Regulated Material (If and Where Directed)	\$ 20.00	\$ 1,000.00
9	1,000 Dollars	Disposal of Regulated Material and Acid Producing Soils Allowance (If and Where Directed)	\$ 1.00	\$ 1,000.00
10	2 Units	Soil Sampling and Analyses, Regulated (If and Where Directed)	\$ 1,500.00	\$ 3,000.00
11	50 C.Y.	I-14 Soil Aggregate (If and Where Directed)	\$ 20.00	\$ 1,000.00
12	50 C.Y.	Dense-Graded Aggregate Base Course, Variable Thickness (If and Where Directed)	\$ 20.00	\$ 1,000.00
13	343,600 S.Y.	HMA Milling, 3" or Less	\$ 3.52	\$ 1,209,472.00
14	150 S.Y.	Hot Mix Asphalt Pavement Repair (If and Where Directed)	\$ 40.00	\$ 6,000.00
15	156,100 L.F.	Polymerized Joint Adhesive	\$ 0.50	\$ 78,050.00
16	34,600 Gallons	Tack Coat	\$ 1.00	\$ 34,600.00
17	300 Gallons	Prime Coat (If and Where Directed)	\$ 0.10	\$ 30.00
18	9,260 Tons	Hot Mix Asphalt 9.5M64 Surface Course	\$ 106.00	\$ 981,560.00

SCHEDULE OF QUANTITIES & PRICES

Project Entitled:

2026 RESURFACING OF VARIOUS COUNTY ROADS

MONMOUTH COUNTY, NEW JERSEY

RFB # F-121-2026

<u>ITEM No.</u>	<u>ESTIMATED QUANTITIES</u>	<u>ITEM</u>	<u>UNIT PRICE</u>	<u>AMOUNT</u>
19	34,570 Tons	Hot Mix Asphalt 12.5M64 Surface Course	<u>\$105.00</u>	<u>\$3,629,850.00</u>
20	50 Tons	Hot Mix Asphalt 19M64 Base Course (If and Where Directed)	<u>\$100.00</u>	<u>\$5,000.00</u>
21	1,260 S.Y.	Side Street Premium	<u>\$16.00</u>	<u>\$20,160.00</u>
22	100 S.Y.	Partial Depth Concrete Repair (If and Where Directed)	<u>\$225.00</u>	<u>\$22,500.00</u>
23	100 S.Y.	Full Depth Concrete Pavement Repair, HMA (If and Where Directed)	<u>\$200.00</u>	<u>\$20,000.00</u>
24	80 L.F.	15" Reinforced Concrete Pipe, Class V (If and Where Directed)	<u>\$150.00</u>	<u>\$12,000.00</u>
25	40 L.F.	12" Ductile Iron Pipe, Class 52 (If and Where Directed)	<u>\$200.00</u>	<u>\$8,000.00</u>
26	1 Units	Inlet, Type A (If and Where Directed)	<u>\$3,717.62</u>	<u>\$3,717.62</u>
27	1 Units	Inlet, Type B (If and Where Directed)	<u>\$5,000.00</u>	<u>\$5,000.00</u>
28	1 Units	Inlet Converted To Manhole (If and Where Directed)	<u>\$2,500.00</u>	<u>\$2,500.00</u>
29	4 Units	Reset Existing Casting (If and Where Directed)	<u>\$600.00</u>	<u>\$2,400.00</u>
30	2 Units	Reconstructed Inlet, Type A, Using Existing Casting (If and Where Directed)	<u>\$1,200.00</u>	<u>\$2,400.00</u>
31	2 Units	Reconstructed Inlet, Type B, Using Existing Casting (If and Where Directed)	<u>\$1,600.00</u>	<u>\$3,200.00</u>
32	2 Units	Reconstructed Inlet, Type E, Using Existing Casting (If and Where Directed)	<u>\$1,600.00</u>	<u>\$3,200.00</u>
33	2 Units	Cleaning Drainage Structure (If and Where Directed)	<u>\$400.00</u>	<u>\$800.00</u>
34	540 S.Y.	Concrete Sidewalk, 4" Thick	<u>\$110.00</u>	<u>\$59,400.00</u>
35	40 S.Y.	Hot Mix Asphalt Driveway, 6" Thick (If and Where Directed)	<u>\$125.00</u>	<u>\$5,000.00</u>
36	40 S.Y.	Concrete Driveway, Reinforced, 6" Thick (If and Where Directed)	<u>\$135.00</u>	<u>\$5,400.00</u>

SCHEDULE OF QUANTITIES & PRICES

Project Entitled:

2026 RESURFACING OF VARIOUS COUNTY ROADS

MONMOTH COUNTY, NEW JERSEY

RFB # F-121-2026

<u>ITEM No.</u>	<u>ESTIMATED QUANTITIES</u>	<u>ITEM</u>	<u>UNIT PRICE</u>	<u>AMOUNT</u>
37	52 S.Y.	Detectable Warning Surface	<u>\$ 350.00</u>	<u>\$18,200.00</u>
38	1,620 L.F.	6" x 20" Concrete Vertical Curb	<u>\$ 45.00</u>	<u>\$72,900.00</u>
39	1,000 L.F.	Traffic Stripes, Long Life, Epoxy Resin 4" (If and Where Directed)	<u>\$1.70</u>	<u>\$1,700.00</u>
40	361,900 L.F.	Traffic Stripes, Thermoplastic 4"	<u>\$0.70</u>	<u>\$253,330.00</u>
41	1,550 S.F.	Traffic Markings Symbols, Thermoplastic	<u>\$ 8.00</u>	<u>\$12,400.00</u>
42	120 Units	RPM, Mono-Directional, White Lens	<u>\$40.00</u>	<u>\$4,800.00</u>
43	100 Units	RPM, Mono-Directional, Amber Lens	<u>\$40.00</u>	<u>\$4,000.00</u>
44	1,070 Units	RPM, Bi-Directional, Amber Lens	<u>\$40.00</u>	<u>\$42,800.00</u>
45	1,000 L.F.	Rumble Strip (If and Where Directed)	<u>\$ 6.00</u>	<u>\$6,000.00</u>
46	1,000 L.F.	Removal of Traffic Stripes (If and Where Directed)	<u>\$ 0.30</u>	<u>\$300.00</u>
47	100 S.F.	Regulatory and Warning Signs (If and Where Directed)	<u>\$45.00</u>	<u>\$4,500.00</u>
48	50 S.Y.	Reset Concrete/Brick Pavers (If and Where Directed)	<u>\$ 85.00</u>	<u>\$4,250.00</u>
49	50 S.Y.	Decorative Pavement Surface Coating - Polymer Cement Surfacing (If and Where Directed)	<u>\$200.00</u>	<u>\$10,000.00</u>
50	2 Units	Relocate Fire Hydrant (If and Where Directed)	<u>\$5,500.00</u>	<u>\$11,000.00</u>
51	2 Units	Reset Manhole, Sanitary Sewer, Using Existing Casting (If and Where Directed)	<u>\$600.00</u>	<u>\$1,200.00</u>
52	2 Units	Reconstructed Manhole, Sanitary Sewer, Using Existing Casting (If and Where Directed)	<u>\$3,000.00</u>	<u>\$6,000.00</u>
53	2 Units	Reset Junction Box (If and Where Directed)	<u>\$2,500.00</u>	<u>\$5,000.00</u>

SCHEDULE OF QUANTITIES & PRICES

Project Entitled:

**2026 RESURFACING OF VARIOUS COUNTY ROADS
MONMOUTH COUNTY, NEW JERSEY
RFB # F-121-2026**

<u>ITEM No.</u>	<u>ESTIMATED QUANTITIES</u>	<u>ITEM</u>	<u>UNIT PRICE</u>	<u>AMOUNT</u>
54	40 L.F.	2" Rigid Metallic Conduit	<u>\$160.00</u>	<u>\$6,400.00</u>
55	100 L.F.	Loop Detector (If and Where Directed)	<u>\$45.00</u>	<u>\$4,500.00</u>
56	5 Units	Spherical Single Camera System	<u>\$45,000.00</u>	<u>\$225,000.00</u>

TOTAL LUMP SUM BID OF ALL ITEMS: \$7,184,019.62
(Numeric)

SEVEN MILLION ONE HUNDRED EIGHTY FOUR THOUSAND NINETEEN DOLLARS
& SIXTY TWO CENTS (Written)

CONTRACTOR: C.J. Hesse, Inc.

BY: David Solviguren
(Printed)


(Signature)

TITLE: Secretary

DATE: 6/24/2026